

Standard Range

T: +44 (0)1621 874201
F: +44 (0)1621 874299


Product Information Sheet

Issue: 02 Date: 10.01.14

DESCRIPTION Extruded polypropylene tube which protects and helps establish trees

APPLICATION For the protection of trees against animal browsing, herbicide spray and for the improvement of growth through a microclimate

SECTORS Forestry and Horticulture

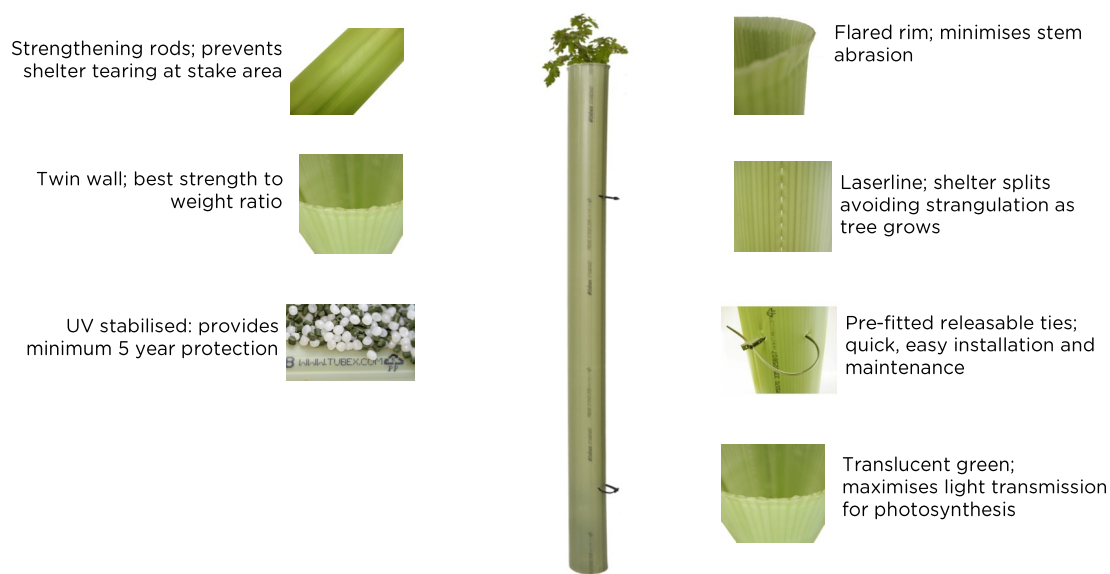

		TUBEX Standard Range			TUBEX Standard Plus Range		
Dimensions							
Height	m	0.6	0.75	1.2	1.2	1.5	1.8
Diameter	mm	73–105	73–105	73–105	80–120	80–120	80–120
No of ties		1 (option to have 2)	2	2	2	2	2
Type of tie		Releasable	Releasable	Releasable	Releasable	Releasable	Releasable
Size of tie	inch	9	9	9	10	10	10
Top tie height (+ tolerance)	mm	435–465	485–515	810–840	810–840	1110–1140	1315–1340
Bottom tie height (+ tolerance)	mm	-	185–215	235–265	235–265	235–265	235–265
Av. Weight per tube	g	72	90	146.5	175	221	265
Packaging							
Nest		5	5	5	5	5	5
Bundle		100	100	100	60	60	60
Bag or strap banded		Bag	Bag	Strap Banded	Strap Banded	Strap Banded	Strap Banded

Material	For all sizes
Tube	Polypropylene
Tie	Nylon
Colour	Green
Service Life	Minimum 5 years
Degradability	Photodegradable
Manufacturing tolerance	- 2.5cm
Recommended support	Stake

*If you require other sizes that are not specified within this data sheet please get in contact.

** We recommend to use TUBEX Combitube on exposed site conditions.

As part of its continual improvement process Fiberweb Geosynthetics Ltd reserve the right to change the properties listed on this data sheet without prior notice.

TM indicates a trade mark of Fiberweb plc or a Fiberweb Group company, many of which are registered in a number of countries around the world.